


PAMREX 900

SAFETY WITH GAS STRUT ASSISTANCE

- Ductile Iron
- EN124 Class D (400kN)
- AS3996 Class E
- Clear opening
- Dual hinged
- Non - ventilated
- 90° blocking system to prevent accidental closure
- Certified to ISO9000:2000
- Includes hinge infiltration plugs & gas strut to aid opening and closure
- SCS Lock and Key

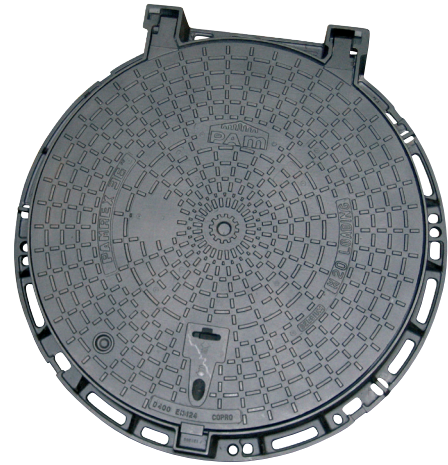

| Reference | Description | | Mass (in kg) | | Dimensions mm | | |
|-------------|----------------|-------|--------------|-------|---------------|--------|-----------------|
| | Type | Frame | Total | Cover | Clear Opening | Height | Frame Size (OD) |
| | | | | | | | |
| CDPA90EHX43 | Non-ventilated | Round | 178 | 93 | 900 | 150 | 1200 |

| PAMREX 900 Accessories | |
|------------------------|---|
| SGPAMREX900-IMP | PAMREX 900 Stainless Steel Safety Grill |
| C18 | PAMREX Opening Key for SCS Lock |
| PLUG | PAMREX Hinge Plug |